

An overview of energy retrofit actions feasibility on Italian historical buildings

A. Galatioto^{a,*}, G. Ciulla^a, R. Ricciu^b

^aDEIM - Dipartimento dell'Energia, dell'Ingegneria dell'Informazione e dei Modelli matematici, Università di Palermo, Italy ^bDICAR-Dipartimento Ingegneria Civile Ambientale e Architettura, Università degli Studi di Cagliari, Italy

<http://dx.doi.org/10.1016/j.energy.2016.12.103>

© <2016>. This manuscript version is made available under the CC-BY-NC-ND 4.0 license <https://creativecommons.org/licenses/by-nc-nd/4.0/>

article info

Keywords:
Historical building
Energy retrofit actions
Refurbishment
Energy efficiency
Building/plant system

abstract

Italian energy policy has determined important keystones in building energy efficiency regulations and their application throughout the country. However, there is still much work to be done in order to make sustainable societies and territories, especially in historical contexts that have the greatest potentiality of energy saving. In detail, in the framework of conservation, restoration, refurbishment, and retrofit actions, the debate among scientists, administrators and skilled people is still open due to the many aspects yet to be considered and solved. In this paper, the state of the art of Italian residential building heritage has been reviewed, while energy retrofit issues and viable solutions have been investigated by collecting literature examples and experiences, focusing on common retrofit measures on historical buildings per thematic area. Finally, the advantages and disadvantages of each action have been discussed.

Anyway, two main aspects have to be solved yet: the high Payback Times and the restriction about Renewable Energy Sources installation on this kind of buildings.

1. Introduction

As is well-known, the greatest energy saving potential lies in a residential building sector that is responsible for approximately 40% of global primary

building energy demand, resulting in significant energy savings, and worldwide, the retrofit actions have to be accurately chosen, to correctly identify the best refurbishment measures to apply on existing buildings [8e10].

More difficult is applying an adequate refurbishment action on old buildings, in particular in Italy, since measures are difficult to implement due to the strict regulation of these buildings' "protected status". Therefore, in the fields of conservation, restoration,

energy demand [1,2]. In this way, European energy policy [3e5] improved energy retrofit actions on buildings and HVAC systems and several noticeable results have already been achieved [6].

In Europe, a large part of the existing building stock shows an average yearly energy demand for space heating and Domestic Hot Water (DHW) production, ranging between 150 and 300 kWh/ m²year [7]. Under such circumstances, even basic energy retrofit actions may significantly reduce the

integrated refurbishment, retro-commissioning and retrofit actions, the scientific and professional debate is still open, because there are many aspects yet to be considered and solved [11], especially since, in Italy, the energy retrofit actions are often focused on modern buildings, generally built after the Second World War.

As reported in the UNESCO World Heritage List, Italy has 4.7% of the world architectural heritage, occupying 46% of the entire country [12]. More in detail, looking at the state of the art of building heritage, over 4,000,000 of the 5,367,000

* Corresponding author.

E-mail addresses: alessandra.galatioto@dream.unipa.it (A. Galatioto), ciulla@dream.unipa.it (G. Ciulla), ricciu@unica.it (R. Ricciu).

worldwide monuments are in Italy and there are many buildings built before 1919 that have public or residential use.

Therefore, the existing historical building stock is wide, heterogeneous and composed of a great amount of buildings with poor energy characteristics.

In this framework, Italian regulation recommends building energy requirements [13] and the revised UNI TS 11300 parts 1-2-3-4 and 5 recommend energy procedures for energy audits of the buildings considering the whole building system [14e18].

It must be noted that the enactment of Italian energy measures, regulations and the gradual restriction of minimum energy requirements has substantially contributed to reduced energy consumption in the residential sector since 2011, and, according to the Italian Energy Efficiency Action Plan (NEAAP) [19], in 2020, the expected primary energy saving amounts to 5.14 Mtoe/y from the residential sector.

However, to date, old buildings and, in general, all buildings located in historical city centres, are excluded from achievement of minimum energy requirements after the application of energy retrofit actions [20,21].

In addition, for residential buildings, the retrofit action application is expensive, voluntary and coming from sporadic decision, causing considerable energy consumption. Therefore, energy refurbishment of historical building seems a very difficult challenge, taking into account the matching among regulations, technical, energy and economic feasibilities.

In this regard, an overview of the interaction process and thematic areas is shown in the flowchart of Fig. 1.

In Fig. 1, the identified energy retrofit areas are shown in the green and orange squares. More in detail, actions are diversified according to difficulties of application of each one, i.e., it can be easier to improve the energy efficiency of the lighting system or the HVAC/DHW system than the envelope or the renewable energy sources (RES) and Thermal Energy Storage technologies exploitation.

Therefore, the choice of an adequate retrofit action is a function of the actual technical standard and the private/public users' expectation. In this end, as reported in the flowchart, building simulations and monitoring, occupant surveys [22] and other analytical tools have a key role in determining the thermophysical and energy characteristics of a building, and simultaneously in assessing the whole feasibility/applicability of the retrofit, also considering the large number of parameters influencing a building's energy performance [23].

This paper aims to analyse the state of art of European and Italian energy retrofit feasibility and application on historical buildings, paying particular attention to energy saving potentialities and issues, to highlight the possibilities for the application of targeted retrofit actions as a source of national energy savings and building reuse improvement.

The proposed methodology is developed by highlighting issues and advantages, area-by-area (Envelope, heating and cooling system, natural ventilation, occupant behaviour, building smart strategies, Renewable Energy Sources and Energy storage), concern the Italian historical building retrofit and related energy saving opportunity.

In the following sections, several European and Italian approaches to building energy classification, technical standards and energy retrofit actions are analysed, focusing on possible application. Moreover, a detailed analysis of residential historical building distribution around Italy and a literature review have been done.

Finally, to help skilled people and public administrations in choosing the retrofit best energy practices, the authors propose a synoptic table that collects international and Italian energy solutions and approaches, by highlighting advantage and disadvantages concerning each application on historical buildings per thematic area.

difficult-to-accept and difficult-to-adopt new energy assessment tools by architects and public administrators. Nevertheless, many international projects

2. Energy efficiency in historical buildings: some experiences

Since 1991, the Italian Standards and Regulations are focused on the energy refurbishment of existing buildings, but currently there is a serious gap between the actual energy performance of historical building conditions and the energy efficiency actions really applicable to them.

Today, recent Italian energy policy [24] encourages Public Administrations and private citizens to apply some retrofit actions by tax breaks and/or co-funding them by providing V 900 million. However, once again funding measures are mainly addressed to modern buildings/plant systems.

In this respect, it must be noted that the entire Italian residential stock amounts to 11,226,595 with an average useful surface of approximately 96 m², while 1,200,000 residential buildings are considered "historical" [12].

Buratti et al. [25] analysed the state of the art of energy certification of households in an Italian region and compared results with national and international indicators, making it possible to evaluate actual energy performances and savings. Focusing on the age of buildings, the results showed that just 6.0% of buildings built before 1950 are provided an energy certificate, and this building stock has the highest energy consumption. Along this line, it is worth noting that the energy classification, in Italy, has been updated by the government in October 2015 [26,27] and, once again, in this updating, historical buildings are not included in the strict requirements enacted for all other buildings.

As affirmed by Andaloro et al. [28], a key point has been established by building energy certification. The authors have compared the degree of adoption and implementation of EPBD measures among European countries and have analysed four parameters. These are the calculation of the methodology of building energy performances, requirements of energy certificate advisors, adopted energy scale and harmonization with CEN requirements. Furthermore, the authors declared that, despite having suitable energy calculation methods, practical results were significantly different for each country, also because building stock varies country by country.

In the same way, Garcia Casals [29] has highlighted the limitation of EU energy regulation and the degree of adoption by European countries. As affirmed by the authors, there were many

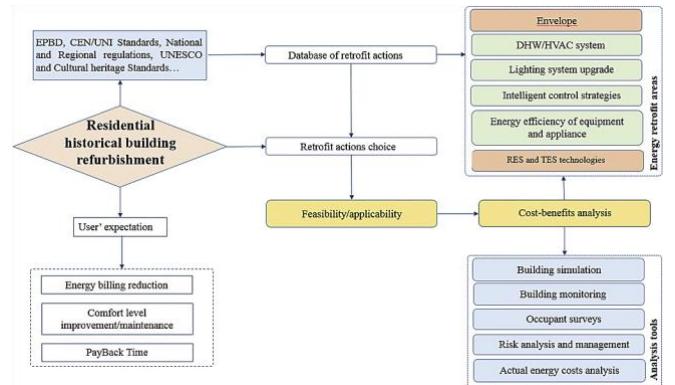


Fig. 1. Flowchart: energy refurbishment design of residential historical building.

Other countries have tried to solve this issue, e.g., the UK acting on National English historical heritage by means of National Planning Policy Framework and energy efficiency strategies [35].

The main topics highlighted by UK Guidelines is the poor insulation of the buildings and the low performance coefficient of the central heating systems, which have to maintain an indoor temperature of 20 C in very large spaces.

Furthermore, Bakonyi and Dobiszay [36] have highlighted the key-role of window refurbishment in old buildings. Authors have proposed a methodology able to improve the heat balance of windows in the Central-European area, by respecting the historical value of glazing elements. The results showed an overcoming of usual calculation based only on U-value which, as affirmed by authors is not a reliable way to find optimized solution in all cases.

Another study, performed in the Baltic Sea Region (BSR), has been made by Zagorskas et al. [37]. Authors have deeply analysed the energy performance of the outside walls of a multi-flat historic buildings. Also in Denmark energy performance requirements for historic buildings is not mandatory, although the occurrence of high-energy consumption of this kind of buildings.

In Italy, the same issue has been considered, but with regard to building insulation the preservation restrictions on historical buildings make it very difficult to apply this action.

Today, building design and/or refurbishment tends to emphasize the nZEB approach [38e40], especially in Italy, where often entire neighbourhoods or cities are classified as "historical."

Hence, the questions can be proposed: In a historical urban area, what is the best energy balance between energy demand and supply? Could the Net Zero Energy Building theory be applied on historical buildings or neighbourhoods? Could the historical buildings/district achieve nZEB targets? Beccali et al. [41] analysed weighting factors, country by country, taking into account primary conversion factors, to assess their affection on energy balance and then the development of energy requirements for each country. The authors attempted to verify how nZEB requirements matching could be affected by the choice of their definition and the choice of weighting factor system. The authors identified many difficulties applying refurbishment measures on existing buildings in achieving Net Zero targets. In this end, Oliveira Panaoa et al.^ [42] have proposed an assessment method able to define nZEB existing building requirements in the Mediterranean area, hence to give a first energy threshold for the primary energy target in nZEB housing, classifying age and housing use. Obviously, nZEB performance levels can be determined with reasonable calculation effort without the use of an iterative approach or optimization algorithm [43]. For example, in Portugal, the first step of the study starts from "before 1960", including all typology materials of buildings. However, taking into account the context, the method is useful and replicable in other countries. The authors have developed an analysis based on an actual study case and a simulated one (carried out from national statistical data), by means of DesignBuilder software [44]. In all analysed cases, an inadequate U-value of envelope and a low energy performance of HVAC and DHW systems were found. The results demonstrated a considerable gap between theoretical calculations and actual cases. As affirmed by the authors, this result is justified by the fact that dynamic simulation is independent of the seasonal thermal requirement. Concerning building age categorization, it must be noted that, in

have been developed to improve energy management strategies, e.g., in the framework of the European Projects LIFEþ program or FACTOR20 project [30,31], several energy retrofit measures in residential buildings and in historical city centres [32] have been suggested at the urban level (building and street lighting) despite the historical value restrictions.

In this regard, AiCARR Guidelines "Energy Efficiency in Historic Buildings" [33] proposes the concept of "improvement" of the current energy requirements, also with regard to occupant safety and comfort. De Santoli [34] has highlighted some needs/shortcomings in the definition of energy requirements of historical buildings. Among these needs was the introduction of a performance index relating to non-renewable primary energy, just one definition of nZEB (Net Zero Energy Building) regardless of the type of building and a definition of exported energy method based on the territorial context.

the literature there are many different age typologies and classifications. In Italy, 30% of buildings were built before 1945, and 18.3% were built between the years 1919 and 1945. Once again, this fact involves a strong dichotomy between aesthetic-architectonical value and energy efficiency goals.

In this way, Fabbri [45] highlighted qualitative and quantitative issues related to protected buildings, indoor quality conditions, thermo-physical peculiarities, HVAC system integration and primary energy demand. As expected, in historical building refurbishment it is possible to not respect minimum standard requirements. The author affirmed that energy consumption is a function of four factors: building use, occupation rate, building envelope type and heating/cooling system performance. Furthermore, energy consumption, per threshold periods, has been classified, and in this case, building energy consumption mostly derives from buildings built before 1919.

In this context, a detailed study has been made by Ciulla et al. [46]; the authors have simulated a typical residential historical building in different Italian climate zones and have estimated energy saving by applying targeted retrofit actions and related economic investments. Furthermore, a classification of retrofit action priority was proposed. Once again, the authors found a possibility to apply retrofit actions on historical buildings by suggesting case-by-case the best economic and energy solution. It must be noted that, as reported by Desogus et al. [47] in a study performed on building samples built in 1950 in Cagliari, the best energy retrofit practices can also be strongly impeded by economic costs.

In this framework, increasingly widespread studies about heating/cooling urban districts [48] or building smart grid [49,50], able to control power consumption and significantly reduce energy needs by using different energy conservation measures must be cited.

Many authors are showing very interesting results in terms of the energy feasibility and cost-effectiveness of different alternatives [51,52].

In the following section, the Italian historical residential building panorama is analysed through data, some scientific experiences, according to climate context and related energy requirements.

3. Italian climate context and historical residential building stock

Italian architectural heritage is unique in the world and belongs to the period from the Xth to the XXIth century. More in detail, 2,147,400 residential buildings were built before 1919 and are listed as historical buildings [53e55]. Generally, these residential buildings are characterized by a massive thermal envelope with specific properties: permeability, sorptivity, mechanical properties and thermal conductivity, which need to be determined [56]. Following traditional and territorial construction technologies, these constructions are composed of local stones or brick and mortar with considerable thickness. Originally, floors and ceilings were constructed by double wood warping, and sometimes provided by canes vaults with support of stone and mortar. It must be noted that Italian territory was subjected to many earthquakes and much rebuilding of entire cities applying different technologies, while from 1910 to 1940, slab with warped steel was spread.

Often, these buildings are characterized by underground spaces and a ground-floor intended for gigs or carriages, while the floors were usually

composed of sequential rooms. The windows were set by wood frame and could

Climate zone	HDD	Heating season	methodology focused on heating, cooling and electrical energy demand of	Operating hours	Number of cities
A	600	From 1st dec to 15th mar		6	2
B	601e900	From 1st dec to 31th mar		8	157
C	901e1400	From 15th nov to 31th mar		10	989
D	1401e2100	From 1st nov to 15th apr		12	1611
E	2101e3000	From 15th oct to 15th apr		14	4271
F	3001	From 5th oct to 22th apr		No limitations	1071

be of different sizes depending on the building typology (noble floor, secondary floor, etc.). The heating system, where present, consisted of a heater or fireplace, while modern heating/cooling and DHW systems were progressively introduced [57].

Therefore, as is well-known, these kinds of buildings have different thermal behaviour from modern ones due to their very massive walls and the climate zone in which they are located.

These typologies are diffused over all Italian territory but their energy performances are different relative to the climate zones. There are areas of the Italian territory that (theoretically) have the same climate, so it is possible to suppose identical or similar conditions.

The Italian Standards are based on ideal heating energy demand (operating for 24 h) and a heating turning on/off system depending on the Climate Zone [58]. In particular, based on the heating degree days (HDD), it is possible to identify six different Climate Zones: from A (the hottest zone) to F (the coolest zone) and for each zone, the daily hours for turning-on the heating system and the period are determined [59]. In this end, the main data are collected in Table 1.

Moreover, a matching data between ISTAT [53e55] and ENEA databases [60] has been done, in order to identify Municipalities distribution per Climate Zone and relating historical residential buildings occurrence. In Italy, there are 8047 Municipalities and 70% of these belong to D and E Climate Zones; the last one includes the most part of Municipalities and of historical residential buildings, as better specified in Fig. 2 and Table 2. In detail, Fig. 2 shows the distribution of only the buildings built before 1919 around the Italian Climate Zones and this stock represents the sample of the representative Italian historical buildings.

To improve the energy performance of these building stocks, in the literature it is possible to find several energy measures, scientific approaches and experiences acting on the thermal envelope, HVAC system, user behaviour, global indoor comfort improvement and possible RES applications.

To have an organized overview of the above-mentioned areas of intervention, in the following sections the authors discuss the main literature examples, highlighting the feasibility of retrofit actions on the buildings and the neighbourhoods.

4. Feasibility of energy retrofit actions on historical buildings

The increasing interest in the energy facet of Italian residential building stock encourages many Italian research projects. Thus, a very interesting project called "TABULA" was developed by TEBE research group from 2013, in the framework of the EPISCOPE project (Energy Performance Indicator Tracking Schemes for the Continuous Optimization of Refurbishment Processes in European Housing Stocks) [61]. The authors divided the Italian residential building stock in eight Building Age Classes, and presented a methodology for the identification of reference buildings aimed at creating a tool for European Building typologies [62,63]. However, even if this method is applicable to many classes, it is not useful for Classes including buildings built before 1900 and from 1901 to 1920, because thermal loss reduction is usually achieved by a strong action on envelope. Hence, also in this case, energy retrofit applications must be evaluated case-by-case. It must be highlighted that in any case, an urban energy map results in a very efficacious strategy, especially when it is applied on urban areas developed before the Second World War.

In this end, Ascione et al. [64] proposed a method to optimize energy generation and use in the historical centre of Benevento (Italy). The proposed

buildings applied on different levels

Table 1
Italian Climate Zones and corresponding HHD according to DPR412/93.

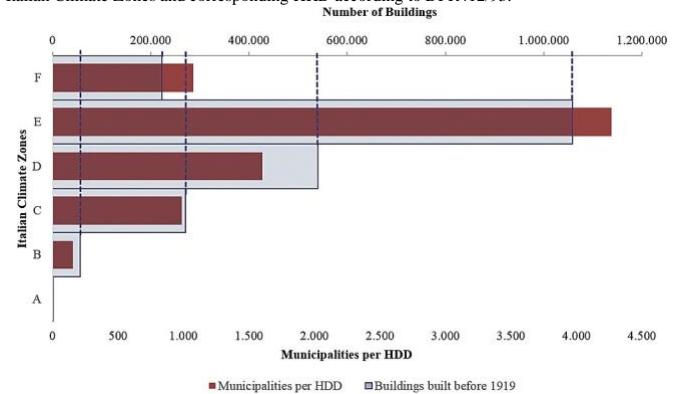


Fig. 2. Historical residential buildings and Municipalities distribution per Climate Zone.

Table 2
Municipalities and historical buildings percentage distribution.

	A	B	C	D	E	F
Municipalities per HDD	0.02%	1.94%	12.19%	19.80%	52.77%	13.28%
Buildings built before 1919	0.01%	2.59%	12.60%	25.13%	49.26%	10.40%

(from building to neighbourhoods). The authors have analysed the energy performance of more than 500 buildings, using standard weather data [65] and GIS tools [66]. Along this line, the authors have characterized the distribution of seasonal energy demand. Furthermore, they have applied a polygeneration system coupled to building-plant systems to reduce the global primary energy consumption. The results showed that an urban energy map is the most useful tool for identifying energy building typologies, and showed which best practices are applicable.

Similarly, Fumo et al. [67] have approached the estimation of building energy consumption through dynamic simulation and fuel bill information to obtain a detailed hourly estimation of building electrical and fuel demands. Meanwhile, to facilitate an understanding of the just mentioned issues for lay people, Asadi et al. [68] developed in 2012 a simple estimation tool able to predict thermal and economic performances of some actions and to make the occupant "energy-conscious".

In the same framework, Caputo et al. [69] have developed a methodology defining and characterizing the energy demand of buildings and entire urban areas by means of 56 building archetype definitions in Milan. Results have shown the effect of improved energy efficiency (building envelope and heating system) on energy policy, also compared to those in the SIRENA database [70] stressing the attention to detailed knowledge consumption and performance of the energy districts.

The same methodological approach has been followed by Horta et al. [71], applying a quantitative methodology to evaluate residential building energy performance at a municipal level in Portugal.

To determine the best energy practices to use in a retrofit phase, in the following sections are collected the more diffuse International and Italian

retrofit measures applicable to Italian historical buildings. Some collected energy measures refer to public and/or modern buildings, but the authors think they are also easily applied to historical buildings.

4.1. Envelope

A detailed envelope knowledge (opaque and transparent) is fundamental to identifying thermal heat flow, thermal inertia, insulation level and proper retrofit actions [72]. Generally, in Italy, before 1976, all insulation occurred on buildings. A literature review showed how the envelope quality is a crucial point in all refurbishment actions [73]. In detail, historical brick walls require detailed analysis of U-value [$\text{W}/\text{m}^2\text{K}$], hydrophobic properties, etc. Furthermore, several aspects of refurbishment action must be taken into account: durability of intervention, impact on energy demand for heating and cooling, fire safety, aesthetic quality, impact on cultural heritage, maintenance, etc. To this end, several thermal insulation materials and technical solutions have been proposed [74e76]. The current eligible best practices take into account the insulation proprieties of several plasters, today available on the construction market for external application, while very few studies are focused on interior insulation of walls. This kind of materials guarantees the breathability in the building, improving indoor safety and air quality. Indeed, insulating plaster can be a very useful tool not only for protecting walls but also for significantly improving the energy efficiency of buildings.

Bianco et al. [77] have tested a new thermal insulating plaster in Turin. This plaster has been produced by adding to the natural vegetal aggregate materials derived from corn production waste. The authors have monitored building behaviour through measurements on the vertical envelope of the heat flux, internal and external surface temperatures and air temperature. The results, carried out with laboratory measurement and a monitoring campaign, have shown a thermal heat flow reduction across the wall of approximately 20e40%. That the hygro-thermal behaviour wall provided interior insulation is well-known [78]. Nevertheless, where it is not possible to apply external material solutions on walls, internal envelope actions could be carefully considered.

Along this line, a laboratory setup conducted by Johansson et al. [79,80] demonstrated the suitability of Vacuum Insulation Panels (VIPs) applications. The authors have analysed four brick and six mortar typologies by using numerical simulations. Furthermore, the authors tested the material impact in a climatic chamber, comparing wall performances with and without interior VIPs, measured relative humidity in thermal bridges, and performed hygro-thermal numerical simulation and measurements. The results showed that interior insulation significantly reduced the wall temperature, while increasing RH from approximately 60%e100%, causing condensing phenomena. However, the authors affirmed that the proper thickness of VIPs surrounding thermal break areas can reduce RH increase, preserve wall quality, while a small reduction of energy saving occurs.

On the other hand, a very interesting proposal has been made by Italian authors [81,82] in 2014. Indeed, after the 2009 earthquake in the Abruzzo region, entire reconstruction of many historical centres was necessary, carefully preserving historical heritage. To this end, the authors have analysed and classified masonry typologies and have proposed different levels of intervention (from low to high transformability). By means of a “case-by-case” methodology, several types of insulation have been proposed and the corresponding energy performance has been evaluated. The results have showed that in some cases, a 50% of energy saving has been achieved.

As mentioned above, a targeted action, especially in wall insulation retrofit, is the best way to limit thermal losses, and in this regard climate plays a key role. Indeed, as studied by Baglivo and Congedo [83] a multi-criteria analysis could be a useful statistical approach to characterizing and optimizing opaque and transparent building envelopes. Therefore, the authors proposed a tool, based on previous studies [84,85], that by means of square symmetrical matrixes, demonstrated the achievement of high performance by thin and ultra-

thin walls in a cold climate, and also analysed acoustic and hygrometric parameters.

On the other hand, Li and Malkawi [86] have applied a multiobjective optimization to predict and control building envelope thermal mass to shift cooling load and reduce energy and economic costs; in this manner a saving of approximately 50% has been demonstrated.

4.2. Heating/cooling system, natural ventilation and occupant behaviour

Heating, ventilation and air-conditioning systems represent the largest energy end use in both the residential and non-residential sector. As affirmed by Perez-Lombard et al. [87], to guarantee indoor thermal comfort, air-conditioning energy consumption accounts for almost half the energy consumed in buildings, and approximately 10e20% of total energy consumption in developed countries. In addition, historical buildings usually show high average heating needs and high energy billing due to several architectural characteristics and legal limits of intervention. Obviously, this fact does not make easy application of efficient energy saving actions. However, many solutions could be adopted respecting the historical value of the building.

Ascione et al. suggests several cheap actions that significantly reduced primary energy consumption [88]. The study was performed on the “Palazzo dell’Aquila Bosco-Lucarelli” located in Benevento (South-Italy) and is used by the University of Sannio. Even if this study had been applied on a public building, most of the proposed actions are replicable on residential buildings. In detail, the authors suggested modifying indoor temperature set-points from 22 C to 20 C in the winter season, and from 24 C to 26 C in the summer season. The results showed that important economical and energy savings can be achieved. Furthermore, the authors proposed other energy saving actions, such as installation of a control valve on each fan-coil, installation of zone thermostats, etc.

Celenza et al. [89] highlighted in a theoretical study how a heating account can be an efficient user’s know-how tool to reduce energy consumption. Indeed, energy billing is based on actual heating, air-conditioning and DHW production economical costs. Therefore, thermal and electrical energy measurement devices can be considered effective tools for enhancing energy efficiency and improving energy savings. The authors have verified that, generally, in historical buildings heating systems are composed of central heating plants with vertical distribution, involving a very difficult distribution of heating cost due to complicated or unfeasible architectonical modification. For this reason, the authors applied an easy and low-cost heating accounting system with thermostatic radiator valves (THV) to set and control proper indoor temperature room by room. Furthermore, the authors have analysed several indirect accounting systems such as heat cost allocators, time counters, and time counters compensated with HDD.

Another interesting study has been performed by Homod et al. [90], in which the authors studied the effect on energy saving through integrating control on both HVAC systems and natural ventilation. In detail, the authors recognized factors affecting indoor air temperature, taking into account the indoor comfort of the occupants in a tropical climate. The results show that the most affecting factor increasing energy consumption is the cooling system. Indeed, it continuously operates even at low outdoor temperatures to guarantee thermal comfort and overcome indoor loads. Simulations have demonstrated that indoor predicted mean vote (PMV) is increased by natural ventilation and energy saving is 31.6% less than in a typical HVAC system. It must be noted that during the last two decades, improvement of appliances into the housing contributes to increased internal loads, so a proper natural ventilation for passive cooling is necessary. Nevertheless, in a naturally ventilated building, air speed should be controlled to satisfy the occupants’ indoor comfort, because, as studied by Etheridge et al. [91], airflow rates constantly vary with the weather.

Gratia et al. [92] have analysed the effect of natural ventilation on cooling and heating load by comparing different building orientations, wind directions and window sizes and positions. The results have shown that several strategies are adoptable to favour the cross ventilation and then the free-cooling. These

strategies include means of single-side day ventilation in which cooling needs are reduced by 30%.

Certainly, these solutions can be easily applied in the area of Southern Italy, where high air temperatures occur throughout much of the year.

4.3. Intelligent control strategies and global indoor comfort

The European Standard EN 15232 [93] put into evidence the key role of Building Automation Control Systems (BACS) and Technical Building Management (TBM) systems. Along this line, proper building system control is an efficient choice for energy demand and maintenance cost decrease, also guaranteeing indoor comfort [94,95]. Indeed, the actual room occupation analysis and its control, in working and domestic spaces, is a very suitable strategy to reduce thermal and electrical energy demand. This EU Standard provides a list of BACS and TBM functions that can affect the energy performance of buildings and introduces a classification of different BAC efficiency classes, based on the control level for the users.

In this framework, the potential for energy savings lies in the control and interaction of heating/cooling systems, appliances and electric devices to reach their full efficiency during operating hours, thanks to the recourse of specific software systems that orchestrate all energy facilities in the house [96,97].

In this way, Caicedo and Pandharipande [98] tested in an office room a multi-hour optimization method taking into account the effect of an actual hour control variable to predict energy consumption in subsequent hours. The authors used a non-linear optimization model, extracting equations that provide accurate and fast solution, that can solve optimization issues for five different occupied zones. Hence, by considering internal and solar gains, heat transfer, ventilation rate, conditioning system load and daylight, the authors demonstrated that multi-hour integrated control considerably increases energy saving with respect to traditional schedule control.

In 2014, Aria and Akbari [99] applied the same methodology to develop a new control system model. The authors considered the thermal effect of individual zones by means of two objective control functions of shade based on illuminance. The results showed that a yearly energy saving of approximately 35% was achieved. These kinds of solutions are easily applicable in working spaces, because time and occupation are generally known and/or predictable, while a different approach has to be adopted for domestic spaces. In fact, in residential zones, it is more challenging to predict energy end-uses, especially if the case study is an urban zone or historical centre. In Italy, the emptying phenomena of these places makes very difficult the analysis of thermal and electrical consumption modelling.

To this end, a statistical approach, by means of modelling data and billing cost, has been studied by Ben and Steemers [100]. The study has been conducted in the UK and it has been applied on the Brunswick Centre in London. Particularly, the authors have analysed the effect of behavioural variables on energy saving using these inputs: building and occupancy data, actual energy use data and behavioural change physical improvement. It must be noted that occupant behaviour is the most important variable for energy saving achievement. The authors have conducted several retrofit action levels and one of these is the characterization of the user's routine. They have classified three levels: low-energy, mediumenergy, and high-energy behaviour based on a more or less "reasonable" heating set-point temperature zone by zone. Particularly, the heating schedule has been set at 21 °C in the living room, while the set-point temperatures into the other rooms were 18 °C. The hypothesized time schedule was: from 07:00 a.m. to 09:00 a.m. and from 04:00 p.m. to 11:00 p.m. in the weekdays, and from 07:00 a.m. to 11:00 p.m. in the weekends. The minimum set-point temperature for the whole flat was 15 °C. The results showed that the behavioural effect (high-e to low-e) on energy saving varies from 62% (low-energy behaviour) to 86% (high-energy behaviour). This theoretical study demonstrated that proper occupant behaviour is one of the most efficient ways to save energy.

In this way, it can be affirmed that a balance between indoor comfort and related energy consumption must be studied. Obviously, proper use of survey tools [101] or adequate thermohygrometric/daylighting performance indices

[102,103] could be useful to identify the best energy measures. Indeed, proper choice of glass replacement and shading use contribute to improved visual comfort conditions and radiation load reduction and control [104,105].

Harmathy et al. [106] have developed a multi-criterion analysis for building envelope optimization taking into account global comfort and energy saving. The authors demonstrated that electric energy saving due to artificial lighting could be reduced of approximately 70%, at the same time guaranteeing occupant visual comfort. A multitude of studies is focused on the impact of solar shading system installation, which is very easy to apply in a particular context such as old buildings, evaluating energy, economic and comfort results. Chaiwiwatworakul et al. [107] demonstrated that by using this system it is possible to achieve an energy savings of up to 80%, while improving indoor visual conditions.

As in other instances, there is no single way to achieve the energy-economic aim, indeed in any case everyone/combination of some of them should be evaluated case-by-case. Finally, in the following section, RES installation issues are reported and specifically, some Italian scientific proposals about RES installation on historical buildings are described.

4.4. Renewable energy sources and energy storage

Distributed energy generation is worldwide studied [108e110] and its advantages and issues have been highlighted especially in trying to make self-energy autonomous buildings and urban centres [111,112].

In Italy, the hardest challenge in building energy actions is the installation of RES, such as PV systems or solar collectors, on historical building roofs. Nevertheless, many researchers and local administrations are involved in this field to solve issues of electrical and thermal energy production on-site [113e115]. It is clear that a proper energy policy, permitting an integrated photovoltaic and thermal (BIPVT) system, could be the best opportunity for distributed clean energy generation in the urban environment [116e118], also taking into account the faster and faster development and market availability of high-performance technologies [119,120].

Bellia et al. [121] have proposed a particular PV system installation on historical buildings in Naples. In fact, the authors have two solutions of PV modules. The first one is a module permitting to respect architectural limits, waterproofing needs and daylight comfort improvement. Indeed, PV panel is half-transparent, but indoor overheating occurs after its installation. For this reason, an opaque PV module installation has been considered. However, the authors have developed a multidisciplinary approach to examine building, concluding that only a complete and diversified action on a building can improve its energy efficiency.

On the other hand, the issue of integration of solar technologies in historical buildings of the Mediterranean area has been enhanced by Moschella et al. in Catania [122]. The authors have analysed the current scenario of integrated solar technologies, paying particular attention to building-integrated photovoltaic (BIPV) systems and building-integrated solar thermal (BIST) application on the envelope. However, in this framework, the important shadowing effect, which occurs in historical centres, must be considered. The authors have proposed a set of retrofit actions such as the application of a hybrid system BIPV/T on a typical historical building representative of the city of Catania. The authors have advised installation of a BIPV/T system on the building façade (without particular historical value) or on the roof and a solution with thin film application. Furthermore, they have proposed replacing the current glass with PV glass on other buildings. The authors demonstrated that RES could be easily applied on historical buildings, but actual implementation of these retrofit actions is more difficult due to the inevitable modification of most of the protected buildings.

On the other hand, many researchers are involved in Thermal Energy Storage (TES) development for residential use that appears very promising in building energy saving in both energy selfproducing and waste heat [123]. According to Pilkington Solar International GmbH [124], TES can be classified basing on storage technology: latent, sensible and chemical and concept: passive or active [125,126].

Despite this technology has a great disadvantage due to the large discrepancy between the supply and the demand [127], as

are collected and advantages and disadvantages of each retrofit action are provided. Furthermore, a subdivision between international and Italian scientific works has been done to highlight how Italian researchers approach the debate and try to solve this problem.

Accordingly, the most difficult energy retrofit action is the improvement of the envelope insulation. This action must be considered "case by case" due to limits of intervention on façades, while a suitable solution could be the internal

Table 3
Synoptic table of citation per energy action area.

Retrofit action		International citations	Italian citations	Advantages	Disadvantages
Wall insulation	Internal	Zagorskas [37]; Jelle [75]; Johansson [79,80]	Bianco [77]; Guizzardi [78]	Façade preservation; energy saving	Condensing issues; internal space decrease; no-effect on thermal bridge; high PBTs
	External	Häkkinen [74]	Desogus [47]	Thermal bridge issue solution; energy saving	Not always applicable; high PBTs
	Both	Roberts [73]; Garas [76]	De Berardinis [81]	Thermal bridge issue solution; energy saving	Not always applicable; high PBTs
Whole envelope insulation	Wall/roof/window	Bakonyi and Dobszay [36]; Asadi [68]; Wang [72];	Ascione [88]	Noticeable energy saving	Not always applicable
HVAC	THV	Gratia [92]	Dalla Mora [38]; Celenza [89]	Thermal comfort maintenance; energy saving	To adapt the actual plant to the installation of THV
Combined actions Building-plant system		Tadeu [40]	Beccali [30]; Ardente. [39]; Franco [57]; Ciampi [82]; Ciulla [46]; Di Pilla [132]	Noticeable energy saving	Not always applicable; high PBTs
Intelligent Control strategies/human factor		Homod [90]; Caicedo [98]; Aria [99]; Ben [100]; Chaiwiatworakul [107]	Pisello [94]; Ippolito [95]; Beccali [96]	Noticeable electrical energy saving	High PBTs
RES and TES		Ruhang [108]; Zhang [109]; Zhang [110]; Milan [112]; Polo Lopez [115]; Zhai [123]; Li [125]; Li [126]; Esen [127e129]; Khadiran [131].	Rotilio [113]; Bonomo [114]; Leone [116]; Bellia [121]; Moschella [122]	Thermal and electrical energy production (great potentiality)	RES: Restrictions on Italian historical centers; TES: further development of technology need

theoretically demonstrated by Esen et al. [128,129] it appear as a good technical solution to be couple to heat pumps.

Indeed, there are several technologies able to be coupled with HVAC systems and RES. In this end, Li [130] recognized factors affecting energy and exergy performances of this kind of system: fluid mass flow rate, tank geometrical structure, fluid properties and fluid temperature.

However to date, experimental studies are focused on materials properties of the system, paying particular attention to Phase Change Materials (PCM) application [131].

Overcoming restrictions about RES installation in historical centres and development of TES technologies could be a powerful way to easily achieve national energy sustainability.

5. Discussion

As mentioned above, it is possible to use different approaches in historical building refurbishment, despite the standard restrictions. In this manner, authors have collected several experiences and studies to aid the choice of the proper energy retrofit action.

In this regard, it must be cited other similar studies that have approached the issue of energy retrofit by different points-of-views as follows: review of energy calculation methods for commercial buildings [132]; energy classification and energy performance diagnosis [133]; building retrofit technologies state-of-the-art [134]; wall composing historical buildings [135] and state-of-theart of green roof technologies upgrading and expected energy saving [136].

However, results showed in this paper give a wide overview on suitable solutions for the specific issue concerns historical building energy retrofit by progressing area-by-area.

Indeed, the current trend to re-inhabiting and reusing Italian historical centres involves a focused approach on energy consumption management. To this end, in the synoptic Table 3, the previously discussed literature experiences

noticeable reduction of primary energy demand is due to replacement of windows. The improvement of energy efficiency on an HVAC system results easily where central heating occurs by using an account-heating system. The smart control of lighting and conditioning systems is developing as one of the most useful energy saving strategies applicable on buildings.

About RES, although some Italian authors proposed such strong actions, to date their installations on historical centres remains the main problem to solve for really improving the energy sustainability of the cities as in other countries.

Anyway, the payback time (PBT) of a single or combination of actions is a key factor in application of each action in residential housing. Indeed, the retrofit action often includes high costs for owners, poor energy benefits and high PBTs. As demonstrated by Ciulla et al. [46], PBTs vary for the same energy measure from colder to warmer zones. Along this line, a clear proof has been provided by Di Pilla et al. [137]. The authors demonstrated how energy-financial plans could be a powerful and strategic way through the investigation of future incentive policies and, underlining the ineffective retrofit actions in some areas, showed that the government should plan and encourage owners to apply energy conservation measures in historical housing.

6. Conclusions

In Italy, historical building retrofitting is a challenge for researchers/architects and administrators. Indeed, the conservation and rehabilitation of historical centres can also improve the energy aspects and the quality of life in local communities.

To improve the energy performance of the actual building heritage, there are several studies that analyse the feasibility of different actions that follow regulatory restrictions. The proposed work is state of the art in the main Italian and international literature. The most significant actions are improvement of the building envelope insulation and the HVAC/DHW systems, while RES and TES integration is difficult.

Therefore, implementation of the discussed actions is not always viable, nor are they the only solution. Moreover, this work is a collection of observations to be used for further information and studies in the field, facilitating the reader in research and comparison. Obviously, a complete analysis is based on the simultaneous evaluation of the economic feasibility and the determination of the related payback time that often discourages owners from taking retrofit actions.

Furthermore, a powerful impetus should be made by the Italian government, by means of a proper energy policy, to regulate the "energy status" of this sector and the application of some cited actions, to promote energy saving strategies, to reduce energy consumption and to preserve the historical value of buildings and centres.

References

- [1] Graça Carvalho M. EU energy and climate change strategy. *Energy* 2012;40: 19e22.
- [2] Ma Z, Cooper P, Daly D, Ledo L. Existing building retrofits: methodology and state of the art. *Energy Build* 2012;55:889e902.
- [3] Decision n. 406/2009/EC of the European Parliament and of the Council of 23 April 2009 on the effort of Member States to reduce their greenhouse gas emissions to meet the community's greenhouse gas emission reduction commitments up to 2020, Official J. Eur. Union L 140/136 (5 June 2009).
- [4] Directive 2009/28/EC of the European Parliament and of the Council of 23 April 2009 on the promotion of the use of energy from renewable sources and amending and subsequently repealing Directives 2001/77/EC and 2003/ 30/EC, Official J. Eur. Union L 140/16 (5 June 2009).
- [5] Directive 2012/27/EU of the European Parliament and of the Council of 25 October 2012 on energy efficiency, amending Directives 2009/125/EC and 2010/30/EU and repealing Directives 2004/8/EC and 2006/32/EC, Official J. Eur. Union L 315/1 (14 November 2012).
- [6] BP statistical review of world energy. 2016 [Accessed 25 October, 2016].
- [7] European Parliament, Directive 2012/27/EU of The European Parliament and of the Council of 25 October 2012 on energy efficiency, amending Directives 2009/125/EC and 2010/30/EU and repealing Directives 2004/8/EC and 2006/ 32/EC, Official Journal of the European Union. L 315/1, 14.11.2012.
- [8] Corrado V, Ballarini I, Corgnati SP. Building typology brochure e Italy. Fascicolo sulla tipologia edilizia Italiana. Technical report. 2013.
- [9] Ahern C, Griffiths P, O'Flaherty M. State of the Irish housing stock-Modelling the heat losses of Ireland's existing detached rural housing stock & estimating the benefit of thermal retrofit measures on this stock. *Energy Policy* 2013;55:139e51.
- [10] Brecha RJ, Mitchell A, Hallinan K, Kissock K. Prioritizing investment in residential energy efficiency and renewable energy-A case study for the U.S. Midwest. *Energy Policy* 2011;39(5):2982e92.
- [11] Mazzarella L. Energy retrofit of historic and existing buildings. The legislative and regulatory point of view. *Energy Build* 2015;95:23e31.
- [12] http://whc.unesco.org/en/wallmap/ [Accessed 11 October 2016].
- [13] Repubblica Italiana, LEGGE 3 agosto 2013, n. 90. Conversione in legge, con modificazioni, del decreto-legge 4 giugno 2013, n. 63, recante disposizioni urgenti per il recepimento della Direttiva 2010/31/UE del Parlamento europeo e del Consiglio del 19maggio 2010, sulla prestazione energetica nell'edilizia per la definizione delle procedure d'infrazione avviate dalla Commissione europea. G.U. n.181 del 3-8-2013.
- [14] UNI/TS 11300e1:2014. Energy performance of buildings - Part 1: Evaluation of energy need for space heating and cooling.
- [15] UNI/TS 11300e2:2014. Energy performance of buildings - Part 2: Evaluation of primary energy need and of system efficiencies for space heating, domestic hot water production, ventilation and lighting for non-residential buildings.
- [16] UNI/TS 11300e3:2010. Energy performance of buildings - Part 3: Evaluation of primary energy and system efficiencies for space cooling.
- [17] UNI/TS 11300e4:2012. Energy performance of buildings - Part 4: Renewable energy and other generation systems for space heating and domestic hot water production.
- [18] UNI/TS 11300e5:2016. Energy performance of buildings - Part 5: Evaluation of energy performance for the classification of building.
- [19] Italian energy efficiency action plan NEAAP. 2016. Available at: https://ec.europa.eu/energy/sites/ener/files/documents/IT%202016%20Energy%20Efficiency%20Annual%20Report_it.pdf [Accessed 11 October, 2016].
- [20] Presidenza Repubblica Italiana, D.Lgs. 42/2004, Codice dei beni culturali e del paesaggio, ai sensi dell'articolo 10 della legge 6 luglio 2002, n. 137.
- [21] DPR 59/09. Regolamento di attuazione dell'articolo 4, comma 1, lettere a) e b), del D.lgs 192/2005 concernente attuazione della Direttiva 2002/91/CE sul rendimento energetico in edilizia. Roma, Italy. 2009.
- [22] Galatioto A, Leone G, Milone D, Pitruzzella S, Franzitta V. Indoor environment [http://refhub.elsevier.com/S0360-5442\(16\)31908-9/sref22mental](http://refhub.elsevier.com/S0360-5442(16)31908-9/sref22mental)
- quality survey: a brief comparison between different Post Occupancy Evaluation methods. *Adv Mater Res* 2014;864e867:1148e52.
- [23] Ciulla G, Lo Brano V, D'amico A. Modelling relationship among energy demand, climate and office building features: a cluster analysis at European level. *Appl Energy* 2016;183:1021e34.
- [24] Ministerial Decree 16/02/2016. Aggiornamento della disciplina per l'incentivazione di interventi di piccole dimensioni per l'incremento dell'efficienza energetica e per la produzione di energia termica da fonti rinnovabili.
- [25] Buratti C, Asdrubal F, Palladino D, Rotili A. Energy performance database of building heritage in the region of Umbria, Central Italy. *Energies* 2015;8(8): 7261e78.
- [26] Ministerial Decree 26/06/2015. Ministero dello Sviluppo Economico - Adeguamento del decreto del Ministro dello sviluppo economico, 26 giugno 2009-Linee guida nazionali per la certificazione energetica degli edifici.
- [27] Presidenza Repubblica Italiana, D. Lgs. 192/2005, Attuazione della direttiva2002/91/CE sul rendimento energetico in edilizia. G.U. n. 222 del 23 settembre2005 S.O. n.158 (come modificato dal D. Lgs. 311/2006, G.U. n. 26 del 1 febbraio2007 S.O. n.26/L).
- [28] Andaloro APF, Salomone R, Ioppolo G, Andaloro L. Energy certification of buildings: a comparative analysis of progress towards implementation in European countries. *Energy Policy* 2010;38:5840e66.
- [29] García Casals X. Analysis of building energy regulation and certification in Europe: their role, limitations and differences. *Energy Build* 2006;38: 381e92.
- [30] Beccali M, Lo Brano V, Ciulla G, Moreci E, Galatioto A. The new building regulation plan schema in the town of Castelbuono (Sicily): the experience of FACTOR20-LIFEþ project. In: Proceedings of 9th conference on sustainable development of energy, water and environment systems; 2014.
- [31] <http://ec.europa.eu/environment/life/> [Accessed 11 October, 2016].
- [32] Beccali M, Bonomo M, Ciulla G, Galatioto A, Lo Brano V. Improvement of energy efficiency and quality of street lighting in South Italy as an action of Sustainable Energy Action Plans. The case study of Comiso (RG). *Energy* 2015;92(3):394e408.
- [33] AICARR. Associazione Italiana Condizionamento dell'Aria Riscaldamento e Refrigerazione. AICARR Guidelines energy efficiency in historic buildings. 2014.
- [34] De Santoli L. Guidelines on energy efficiency of cultural heritage. *Energy Build* 2015;86:534e40.
- [35] Energy Efficiency and Historic Buildings. Application of Part L of the Building Regulations to historic and traditionally constructed buildings. www.englishheritage.org.uk [Accessed 11 October, 2016].
- [36] Bakonyi D, Dobszay G. Simulation aided optimization of a historic window's refurbishment. *Energy Build* 2016;126:51e69.
- [37] Zagorskas J, Palulis GM, Burinskienė_M, Venckauskaitė_J, Rasmussen TV. Energetic refurbishment of historic brick buildings: problems and opportunities. *Environ Clim Technol* 2013;12(1):20e7.
- [38] Dalla Mora T, Cappelletti F, Peron F, Romagnoni P, Bauman F. Retrofit of an historical building toward NZEB. *Energy Procedia* 2015;78:1359e64.
- [39] Ardente F, Beccali M, Cellura M, Mistretta M. Energy and environmental benefits in public buildings as a result of retroFit actions. *Renew Sustain Energy Rev* 2011;15:460e70.
- [40] Tadeu S, Rodrigues C, Tadeu A, Freire F, Simões N. Energy retrofit of historic buildings: environmental assessment of cost-optimal solutions. *J Build Eng* 2015;4:167e76.
- [41] Beccali M, Galatioto A, Leone G, Longo S. Is the NZEB benchmarking approach suitable for assessing energy retroFit design? *Appl Mech Mater* 2013;361:e363:402e7.
- [42] Oliveira Pan~ao MJN, Rebelo MP, Camelo SML. How low should be the energy required by a nearly Zero-Energy Building? The load/generation energy balance of Mediterranean housing. *Energy Build* 2013;61:161e71.
- [43] Kurnitski J, Saari A, Kalamees T, Vuolle M, Niemela J, Tark T. Cost optimal and nearly zero (nZEB) energy performance calculations for residential buildings with REHVA definition for nZEB national implementation. *Energy Build* 2011;43:3279e88.
- [44] <http://www.designbuilder.co.uk/> [Accessed 10 October, 2016].
- [45] Fabbri K. Energy incidence of historic building: leaving no stone unturned. *J Cult Herit* 2013;14:S25e7.
- [46] Ciulla G, Galatioto A, Ricciu R. Energy and economic analysis and feasibility of retrofit actions in Italian residential historical buildings. *Energy Build* 2016;128:649e59.
- [47] Desogus G, Di Pilla L, Mura S, Pisano GL, Ricciu R. Economic efficiency of social housing thermal upgrade in Mediterranean climate. *Energy Build* 2013;57:354e60.
- [48] Gustafsson M, Roennelid M, Trygg L, Karlsson B. CO₂ emission evaluation of energy conserving measures in buildings connected to a district heating system e Case study of a multi-dwelling building in Sweden. *Energy* 2016;111:341e50.
- [49] Croce D, Giuliano F, Tinnirello I, Galatioto A, Bonomo M, Beccali M, et al. Overgrid: a fully distributed demand response architecture based on overlay networks. *IEEE Trans Automat Sci Eng* 2016;(99):1e11. <http://dx.doi.org/10.1109/TASE.2016.2621890>. Article in press.
- [50] Grimm C, Molina JM, Mahlknecht S, Damm M, Lukasch F. Infrastructures and platforms for smart energy buildings and neighborhoods. *Int J Energy a Clean Environ* 2013;14(1):21e39.

- [51] Tereshchenko T, Nord N. Energy planning of district heating for future building stock based on renewable energies and increasing supply flexibility. *Energy* 2016;112:1227e44.
- [52] Beccali M, Ciulla G, Di Pietra B, Galatioto A, Leone G, Piacentino A. Assessing the feasibility of cogeneration retrofit and district heating/cooling networks in small Italian islands. In: Proceedings of the 11th conference on sustainable development of energy, water and environment systems e SDEWES, Lisbon; 2016.
- [53] ISTAT. 141 Censimento Generale della Popolazione e delle Abitazioni, Roma. 2001.
- [54] ISTAT. Popolazione residente e abitazioni nei grandi comuni italiani d Milano, 141 Censimento Generale della Popolazione e delle Abitazioni, Roma. 2006.
- [55] ISTAT, home page of ISTAT. Webpage. 2012. <http://www.istat.it>. [Accessed 10 October, 2016].
- [56] Pia G, Casnedi L, Ricciu R, Besaldich LA, Cocco O, Murru A, et al. Thermal properties of porous stones in cultural heritage: experimental findings and predictions using an intermingled fractal units model. *Energy Build* 2016;118:232e9.
- [57] Franco G, Magrini A, Cartesegna M, Guerrini M. Towards a systematic approach for energy refurbishment of historical buildings. The case study of Albergo dei Poveri in Genoa, Italy. *Energy Build* 2015;95:153e9.
- [58] Presidenza Repubblica Italiana. D.P.R. 412/1993 Regolamento recante norme per la progettazione, l'installazione, l'esercizio e la manutenzione degli impianti termici degli edifici ai fini del contenimento dei consumi di energia, in attuazione dell'art. 4, comma 4, della legge 9 gennaio 1991, n. 10; modified by D.P.R. 74/2013-manutenzione e controllo degli impianti termici. [59] Ciulla G, Lo Brano V, Moreci E. Degree days and building energy demand. Proceedings of 3rd Southern African Solar Energy Conference, South Africa, 11-13 May, 2015.
- [60] <http://clisun.casaccia.enea.it/Pagine/GradiGiorni.htm>. [Accessed 10 October 2016].
- [61] <http://episcope.eu/index.php?id=497> [Accessed 10 October 2016].
- [62] Ballarini I, Cognati SP, Corrado V. Use of reference buildings to assess the energy saving potentials of the residential building stock: the experience of TABULA project. *Energy Policy* 2014;68:273e84.
- [63] <http://webtool.building-typology.eu/>. [Accessed 10 October 2016].
- [64] Ascione F, Canelli M, De Masi RF, Sasso M, Vanoli GP. Combined cooling, heating and power for small urban districts: an Italian case-study. *Appl Therm Eng* 2014;71:705e13.
- [65] <http://meteonorm.com/>. [Accessed 10 October 2016].
- [66] www.usgs.gov/research/gis. [Accessed 10 October 2016].
- [67] Fumo N, Mago P, Luck R. Methodology to estimate building energy consumption using EnergyPlus Benchmark Models. *Energy Build* 2010;42: 2331e7.
- [68] Asadi S, Hassan M, Beheshti A. Development and validation of a simple estimating tool to predict heating and cooling energy demand for attics of residential buildings. *Energy Build* 2012;54:12e21.
- [69] Caputo P, Costa G, Ferrari S. A supporting method for defining energy strategies in the building sector at urban scale. *Energy Policy* 2013;55:261e70.
- [70] Sistema Informativo Regionale Energia Ambiente (SIRENA), 2012. <http://www.energiabarbardia.eu/sirena20>. [last access April 2105].
- [71] Horta IM, Camanho AS, Dias TG. Residential building resource consumption: a comparison of Portuguese municipalities' performance. *Cities* 2016;50: 54e61.
- [72] Wang P, Gong G, Wang Y, Li L. Thermodynamic investigation of building integrated energy efficiency for building retrofit. *Energy Build* 2014;77: 139e48.
- [73] Roberts BC, Webber ME, Ezekoye OA. Development of a multi-objective optimization tool for selecting thermal insulation materials in sustainable designs. *Energy Build* 2015;105:358e67.
- [74] Heikkilä T. Systematic method for the sustainability analysis of refurbishment concepts of exterior walls. *Constr Build Mater* 2012;37:783e90.
- [75] Jelle BP. Traditional, state-of-the-art and future thermal building insulation materials and solutions e properties, requirements and possibilities. *Energy Build* 2011;43:2549e63.
- [76] Garas G, Allam M. Thermal performance of plastered rice straw bales and walls: a case study. *Int J Sustain Dev Plan* 2012;6(2):226e37.
- [77] Bianco L, Serra V, Fantucci S, Dutto M, Massolino M. Thermal insulating plaster as a solution for refurbishing historic building envelopes: first experimental results. *Energy Build* 2015;95:86e91.
- [78] Guizzardi M, Derome D, Vonbank R, Carmeliet J. Hygrothermal behavior of a massive wall with interior insulation during wetting. *Build Environ* 2015;89: 59e71.
- [79] Johansson P, Hagentoft C-E, Kalagasidis AS. Retrofitting of a listed brick and wood building using vacuum insulation panels on the exterior of the facade: measurements and simulations. *Energy Build* 2014;73:92e104.
- [80] Johansson P, Geving S, Hagentoft C-E, Jelle BP, Rognvik E, Kalagasidis AS, Time B. Interior insulation retrofit of a historical brick wall using vacuum insulation panels: hygrothermal numerical simulations and laboratory investigations. [http://refhub.elsevier.com/S0360-5442\(16\)31908-9/sref80](http://refhub.elsevier.com/S0360-5442(16)31908-9/sref80). *Build Environ* 2014;79:31e45.
- [81] De Berardinis P, Rotilio M, Marchionni C, Friedman A. Improving the energy efficiency of historic masonry buildings. A case study: a minor centre in the Abruzzo region, Italy. *Energy Build* 2014;80:415e23.
- [82] Ciampi G, Rosato A, Scorpio M, Sibillo S. Energy and economic evaluation of retrofit actions on an existing historical building in the south of Italy by using a dynamic simulation software. *Energy Procedia* 2015;78:741e6.
- [83] Baglivo C, Congedo PM. High performance precast external walls for cold climate by a multi-criteria methodology. *Energy* 2016;115:561e76.
- [84] Aste N, Angelotti A, Buzzetti M. The influence of the external walls thermal inertia on the energy performance of well insulated buildings. *Energy Build* 2009;41(11):1181e7.
- [85] Al-Sanea SA, Zedan MF, Al-Hussain SN. Effect of thermal mass on performance of insulated building walls and the concept of energy savings potential. [http://refhub.elsevier.com/S0360-5442\(16\)31908-9/sref85](http://refhub.elsevier.com/S0360-5442(16)31908-9/sref85). *Appl Energy* 2012;89(1):430e42.
- [86] Li X, Malkawi A. Multi-objective optimization for thermal mass model predictive control in small and medium size commercial buildings under summer weather conditions. *Energy* 2016;112:1194e206.
- [87] Perez-Lombard L, Ortiz J, Pout C. A review on buildings energy consumption information. *Energy Build* 2008;40:394e8.
- [88] Ascione F, de Rossi F, Vanoli GP. Energy retrofit of historical buildings: theoretical and experimental investigations for the modelling of reliable performance scenarios. *Energy Build* 2011;43:1925e36.
- [89] Celentza L, Dell'Isola M, Ficco G, Palella BI, Riccio G. Heat accounting in historical buildings. *Energy Build* 2015;85:47e56.
- [90] Homod RZ, Salleh K, Sahari M, Almurib HAF. Energy saving by integrated control of natural ventilation and HVAC systems using model guide for comparison. *Renew Energy* 2014;71:639e50.
- [91] Etheridge D. Unsteady flow effects due to fluctuating wind pressures in natural ventilation design-instantaneous flow rates. *Build Environ* 2000;35: 321e37.
- [92] Gratia E, Bruyere I, De Herde A. How to use natural ventilation to cool narrow office buildings. *Build Environ* 2004;39(10):1157e70.
- [93] European Technical Standard EN 15232. Energy performance of buildings e impact of building automation, control, and building management. second ed. Brussels: CEN; 2012.
- [94] Pisello AL, Asdrubali F. Human-based energy retrofits in residential buildings: a cost effective alternative to traditional physical strategies. [http://refhub.elsevier.com/S0360-5442\(16\)31908-9/sref94](http://refhub.elsevier.com/S0360-5442(16)31908-9/sref94). *Appl En* 2014;133:224e35.
- [95] Desogus G, Di Benedetto S, Ricciu R. The use of adaptive thermal comfort models to evaluate the summer performance of a Mediterranean earth building. *Energy Build* 2015;104:350e9.
- [96] Ippolito MG, Riva Sanseverino E, Zizzo G. Impact of building automation control systems and technical building management systems on the energy performance class of residential buildings: an Italian case study. *Energy Build* 2014;69:33e40.
- [97] Beccali M, Bonomo M, Galatioto A, Ippolito MG, Zizzo G. A laboratory setup for the evaluation of the effects of BACS and TBM systems on lighting. In: Proceedings of 4th international conference on renewable energy research and applications; 2015.
- [98] Caicedo D, Pandharipande A. Daylight integrated illumination control of LED systems based on enhanced presence sensing. *Energy Build* 2011;43: 944e50.
- [99] Aria H, Akbari H. Integrated and multi-hour optimization of office building energy consumption and expenditure. *Energy Build* 2014;82:391e8.
- [100] Ben H, Steemers K. Energy retrofit and occupant behavior in protected housing: a case study of the Brunswick Centre in London. *Energy Build* 2014;80:120e30.
- [101] Choi J, Loftness V, Aziz A. Post-occupancy evaluation of 20 office buildings as basis for future IEQ standards and guidelines. *Energy Build* 2012;46:167e75.
- [102] Galatioto A, Beccali M. Aspects and issues of daylighting assessment: a review study. [http://refhub.elsevier.com/S0360-5442\(16\)31908-9/sref102](http://refhub.elsevier.com/S0360-5442(16)31908-9/sref102). *Renew Sustain Energy Rev* 2016;66:852e60.
- [103] Atzori AM, Cappelletti F, Tzempelikos A, Gasparella A. Comfort metrics for an integrated evaluation of buildings performance. *Energy Build* 2016;127: 411e24.
- [104] Aries MBC, Newsham GR. Effect of daylight saving time on lighting energy use: a literature review. *Energy Policy* 2008;36(6):1858e66.
- [105] Hee WJ, Alghoul MA, Bakhtyar B, OmKalthum E, Shameri MA, Alrubaih MS, et al. The role of window glazing on daylighting and energy saving in buildings. *Renew Sustain Energy Rev* 2015;42:323e43.
- [106] Harmathy N, Magyar Z, Folik R. Multi-criterion optimization of building envelope in the function of indoor illumination quality towards overall energy performance improvement. *Energy* 2016;114:302e17.
- [107] Chaiwiwatworaluk P, Chirattananon S, Rakwamsuk P. Application of automated blind for daylighting in tropical region. *Energy Convers Manag* 2009;50:2927e43.
- [108] Ruhang X. The restriction research for urban area building integrated gridconnected PV power generation potential. *Energy* 2016;113:124e43.
- [109] Zhang S. Analysis of DSPV (distributed solar PV) power policy in China. *Energy* 2016;98:92e100.
- [110] Fonseca JA, Schlueter A. Novel approach for decentralized energy supply and energy storage of tall buildings in Latin America based on renewable energy sources: case study

e informal vertical community Torre David, Caracas e Venezuela. Energy 2013;53:93e105.

- [111] Zhang S, Huang P, Sun Y. A multi-criterion renewable energy system design optimization for net zero energy buildings under uncertainties. Energy 2016;94:654e65.
- [112] Milan C, Bojesen C, Nielsen MP. A cost optimization model for 100% renewable residential energy supply systems. Energy 2012;48(1):118e27.
- [113] Rotilio M, De Berardinis P, Cucchiella F. Renewable energy sources in minor historical centers. New scenarios of sustainable development of the territory. Green Energy Technol 2015;173:75e106.
- [114] Bonomo P, De Berardinis P. PV integration in minor historical centers: proposal of guide-criteria in post-earthquake reconstruction planning. Energy Procedia 2014;48:1549e58.
- [115] Polo Lopez CS, Frontini F. Energy efficiency and renewable solar energy integration in heritage historic buildings. Energy Procedia 2014;48: 1493e502.
- [116] Leone G, Beccali M. Use of finite element models for estimating thermal performance of façade-integrated solar thermal collectors. Appl Energy 2016;171:392e404.
- [117] Tian Y, Zhao CY. A review of solar collectors and thermal energy storage in solar thermal applications. Appl Energy 2013;104:538e53.
- [118] Chow TT. A review on photovoltaic/thermal hybrid solar technology. Appl Energy 2010;87:365e79.
- [119] Lo Brano V, Ciulla G, Piacentino A, Cardona F. On the efficacy of PCM to shave peak temperature of crystalline photovoltaic panels: an FDM model and field validation. Energies 2013;6(12):6188e210.
- [120] Ciulla G, Lo Brano V, Cellura M, Franzitta V, Milone D. A finite difference model of a PV-PCM system. Energy Procedia 2012;30:198e206.
- [121] Bellia L, d'Ambrosio Alfano FR, Giordano J, Ianniello E, Riccio G. Energy requalification of a historical building: a case study. Energy Build 2015;95: 184e9.
- [122] Moschella A, Salemi A, Lo Faro A, Sanfilippo G, Detommaso M, Privitera A. Historic buildings in Mediterranean area and solar thermal technologies: architectural integration vs preservation criteria. Energy Procedia 2013;42: 416e25.
- [123] Zhai ZJ, Abarri MLL, AL-Saadi SNJ, Yate P. Energy storage for residential buildings: review and advances. In: Proceedings of APEC conference on lowcarbon towns and physical energy storage; 2013 [China].
- [124] Pilkington Solar International GmbH. Survey on thermal storage for parah^{http://refhub.elsevier.com/S0360-5442(16)31908-9/sref124}bolic through power plants. Report. National Renewable Energy Laboratory; 2000.
- [125] Li G, Hwang Y, Radermacher R. Review of cold storage materials for air^{http://refhub.elsevier.com/S0360-5442(16)31908-9/sref125}conditioning application. Int J Refrig 2012;35:2053e77.
- [126] Li G, Qian S, Lee H, Hwang Y, Radermacher R. Experimental investigation of energy and exergy performance of short term adsorption heat storage for residential application. Energy 2014;65:675e91.
- [127] Esen M. Thermal performance of a solar-aided latent heat store used for space heating by heat pump. Sol Energy 2000;69(1):15e25.
- [128] Esen M, Ayhan T. Development of a model compatible with solar assisted cylindrical energy storage tank and variation of stored energy with time for different phase change materials. Energy Convers Manag 1996;37(12): 1775e85.
- [129] Esen M, Durmus, A, Durmus, A. Geometric design of solar-aided latent heat store depending on various parameters and phase change materials. Sol Energy 1998;62(1):19e28.
- [130] Li G. Sensible heat thermal storage energy and exergy performance evalu^{http://refhub.elsevier.com/S0360-5442(16)31908-9/sref130}ations. Renew Sustain Energy Rev 2016;53:897e923.
- [131] Khadiran T, Hussein MZ, Zainal Z, Rusli R. Advanced energy storage materials for building applications and their thermal performance characterization: a review. Renew Sustain Energy Rev 2016;57:916e28.
- [132] Lee SH, Hong T, Piette MA, Taylor-Lange SC. Energy retrofit analysis toolkits for commercial buildings: a review. Energy 2015;89:1087e100.
- [133] Wang S, Yan C, Xiao F. Quantitative energy performance assessment methods for existing buildings. Energy Build 2012;55:873e88.
- [134] Ma Z, Cooper P, Daly D, Ledo L. Existing building retrofits: methodology and state-of-the-art. Energy Build 2012;55:889e902.
- [135] Blumberga A, Kass K, Kamendere E. A review on latvian historical building stock with heavy walls. Energy Procedia 2016;95:17e21.
- [136] Karteris M, Theodoridou I, Mallinis G, Tsirios E, Karteris A. Towards a green sustainable strategy for Mediterranean cities: assessing the benefits of largescale green roofs implementation in Thessaloniki, Northern Greece, using environmental modelling, GIS and very high spatial resolution remote sensing data. Renew Sustain Energy Rev 2016;58:510e25.
- [137] Di Pilla L, Desogus G, Mura S, Ricciu R, Di Francesco M. Optimizing the distribution of Italian building energy retrofit incentives with Linear Pro^{http://refhub.elsevier.com/S0360-5442(16)31908-9/sref137}gramming. Energy Build 2016;112:21e7.